

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____


Model name		SPRC-101
Power supply	V, Ph, Hz	Powered from two AA dry batteries
Temperature setting range	°F	61 - 90
Dimensions (H x W x D)	in	6 1/8 x 1 1/8

KEY FEATURES:

- ◆ Cooling / Heating / Auto
- ◆ Performance monitoring
- ◆ Automatic test run
- ◆ Backlight
- ◆ Individual blind control
- ◆ Health (Air Fresh)
- ◆ Sleep
- ◆ 3D airflow
- ◆ Fan speed
- ◆ 24 hour time
- ◆ Self-diagnosis function
- ◆ Built-in temperature sensor
- ◆ Breeze mode
- ◆ ECO (energy saving)
- ◆ Sleep
- ◆ Self cleaning



	Health		ON / OFF
	Temp "+"		Temp "-"
	Mode		Fan
	ECO		Louver
	Sleep		Boost
	Electric heater		Quiet
	Timer		3D / Ultra
	Light		

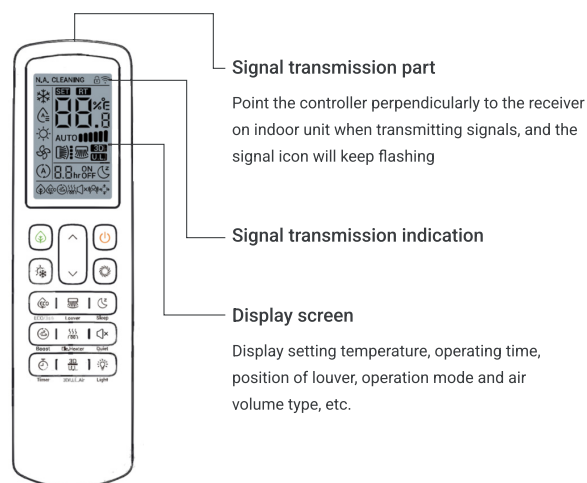

NOTES:

1. The nominal cooling capacity is the combined capacity of the Cooper & Hunter standard split system. Cooling operation conditions: indoor air inlet temperature: 80°F DB, 66°F WB, outdoor air inlet temperature: 95°F DB. Heating operation conditions: indoor air inlet temperature: 68°F DB, outdoor air inlet temperature: 44°F DB, 42°F WB. Piping Length: 24.6ft, Piping Lif:0ft
2. The sound pressure level is based on following conditions. 4.9ft Beneath the Unit. With Discharge Duct (6.5ft.) and Return Duct (3.3ft.). Voltage of the power source for the indoor fan motor is 208V. The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
3. The data for external pressure *(1) indicates Standard Pressure Setting values when a filter is not used.
4. The above air flow rate and noise level are tested with AC 208V power supply and without filter screen.