


Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____



KEY FEATURES:


- ◆ Maximum 16 indoor units controllable
- ◆ 6 fan speed
- ◆ Optional setting
- ◆ Dehumidification control
- ◆ 3D airflow
- ◆ Build in temperature sensor
- ◆ Room temperature display
- ◆ Self-cleaning

Main Functions

- ◆ ON/OFF
- ◆ Mode-Cool/Heat/Auto/Dehumidification/Fan
- ◆ Fan speed
- ◆ Louver setting
- ◆ Temperature setting
- ◆ Operation monitoring
- ◆ Timer
- ◆ Main-sub control
- ◆ Change indoor address
- ◆ Check function
- ◆ Air filter cleaning reminding
- ◆ Error code display
- ◆ Auto test run
- ◆ Self diagnostic function
- ◆ Louver controlled independently
- ◆ Breeze mode
- ◆ Motion sensor
- ◆ Mute
- ◆ Sleep
- ◆ Window contact
- ◆ Health
- ◆ Unit change(°C/°F)

Model name	SPWT-A01	
Power supply	V, Ph, Hz	Powered from indoor unit
Temperature setting range	°F	61-90 °F
Dimensions (H x W x D)	in	4 23/32 x 4 23/32

BUTTON AND DISPLAY INTRODUCTION

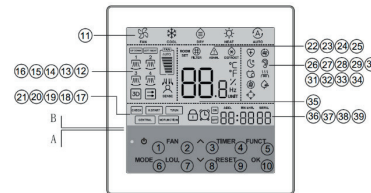

A. Operation button

- On/Off
- Fan
- Temperature "+"
- Timer
- Function
- Mode
- Louver
- Temperature "-"
- Reset
- Ok

B. Screen display

- Operation mode "Fan/Cool/Dry/Heat/Auto"
- Health
- Fan
- Boost
- Louver
- Sleep
- 3D outlet
- Quiet
- Ultra-far
- ECO
- Human sense
- Electric Heater
- Check
- Self-cleaning
- Hot Start
- Nature wind
- Test Run
- Wind free
- Centralized Control
- Set temp/humidity/room temp
- No Function
- Lock
- Room/Set temp
- Timed powered on/off
- Filter
- System address setting
- Alarm
- Service code
- Defrosting

NOTES:

- The nominal cooling capacity is the combined capacity of the Cooper & Hunter standard split system. Cooling operation conditions: indoor air inlet temperature: 80°F DB, 66°F WB, outdoor air inlet temperature: 95°F DB. Heating operation conditions: indoor air inlet temperature: 68°F DB, outdoor air inlet temperature: 44°F DB, 42°F WB. Piping Length: 24.6ft, Piping Lif:0ft
- The sound pressure level is based on following conditions. 4.9ft Beneath the Unit. With Discharge Duct (6.5ft.) and Return Duct (3.3ft.). Voltage of the power source for the indoor fan motor is 208V. The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
- The data for external pressure *(1) indicates Standard Pressure Setting values when a filter is not used.
- The above air flow rate and noise level are tested with AC 208V power supply and without filter screen.